


# easyflex Party and Exhibition Hall

Type: 10.2/280 · Model: 480

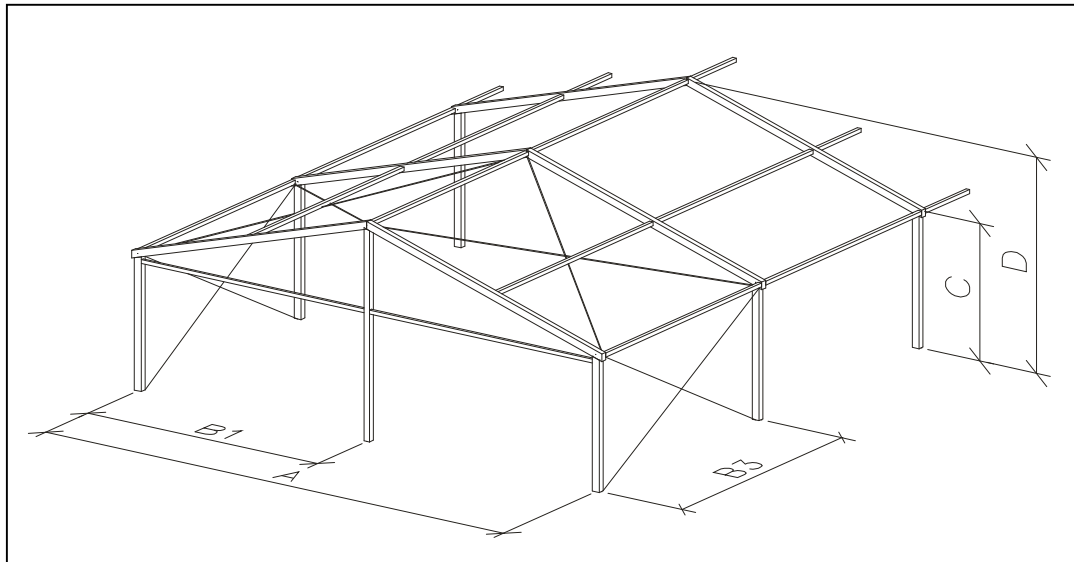

## System Measures

Width	(A)	10.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	4.48 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.45 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request


## Load Requirements/Technical Data

Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance

Subject to technical modifications!

# easyflex Party and Exhibition Hall

Type: 10.2/340 · Model: 482

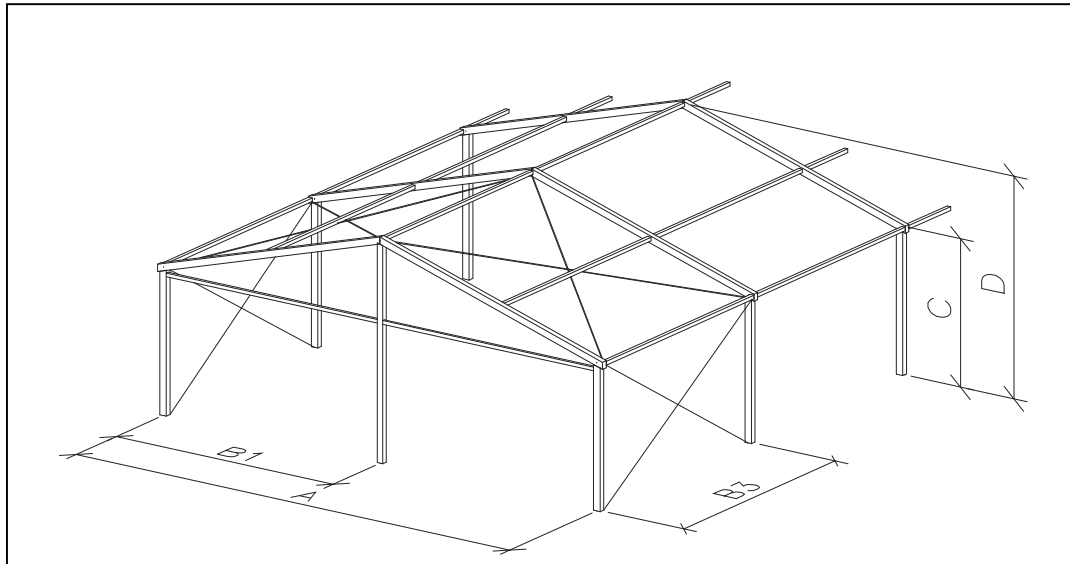

## System Measures

Width	(A)	10.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	4.88 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	- m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.45 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data


Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance

Subject to technical modifications!



# easyflex Party and Exhibition Hall

Type: 12.2/280 · Model: 485

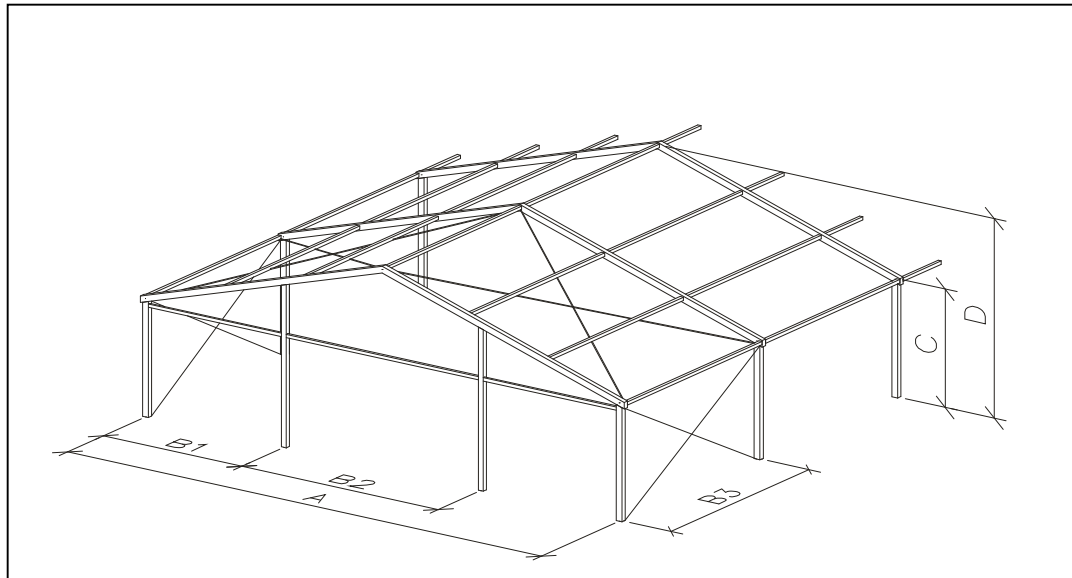

## System Measures

Width	(A)	12.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	4.80 m
Gable truss	(B1)	3.51 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.51 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data


Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance

Subject to technical modifications!



# easyflex Party and Exhibition Hall

Type: 12.2/340 · Model: 486

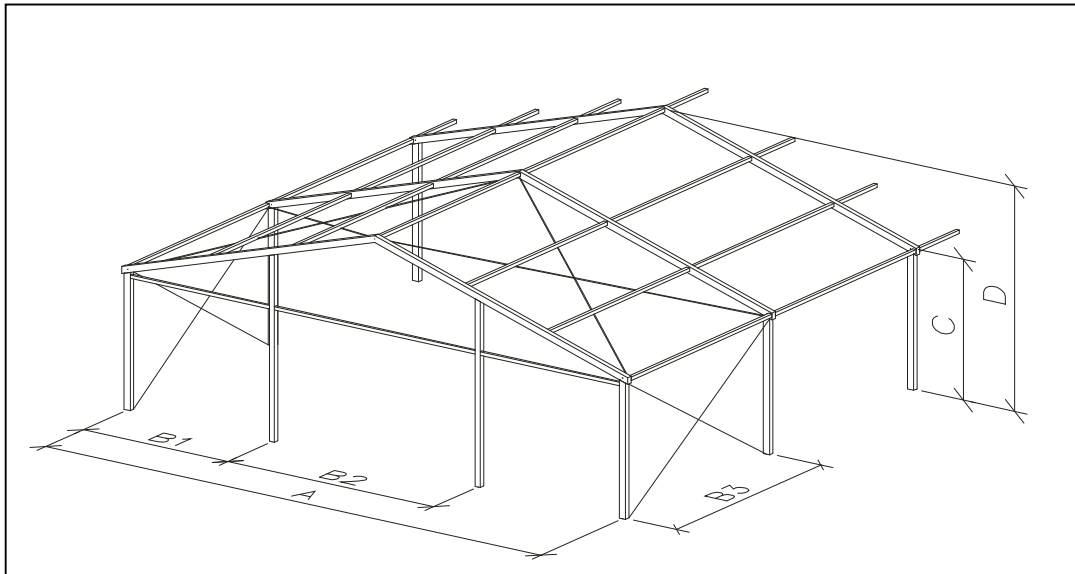

## System Measures

Width	(A)	12.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.20 m
Gable truss	(B1)	3.51 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.51 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data

Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

# easyflex Party and Exhibition Hall

Type: 15.2/280 · Model: 487

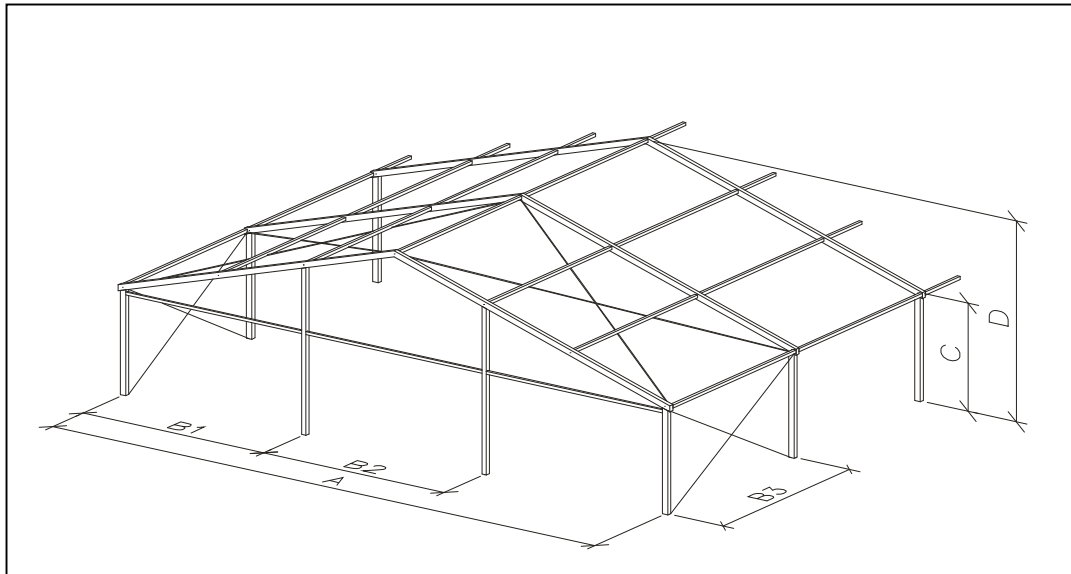

## System Measures

Width	(A)	15.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	5.29 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data

Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

# easyflex Party and Exhibition Hall

Type: 15.2/340 · Model: 488

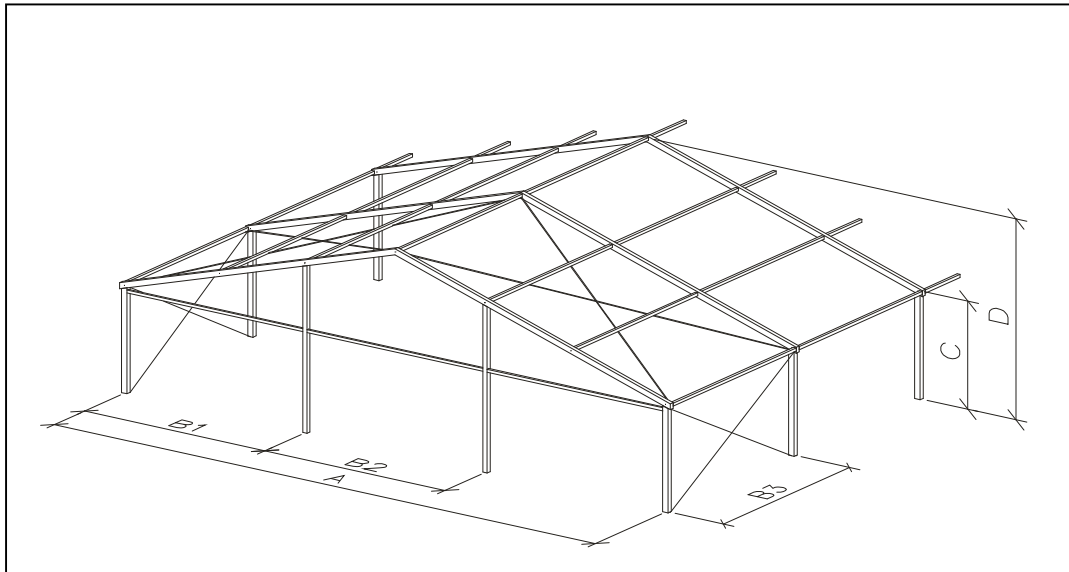

## System Measures

Width	(A)	15.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.69 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		8.08 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data

Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

# easyflex Party and Exhibition Hall

Type: 18.2/280 · Model: 587

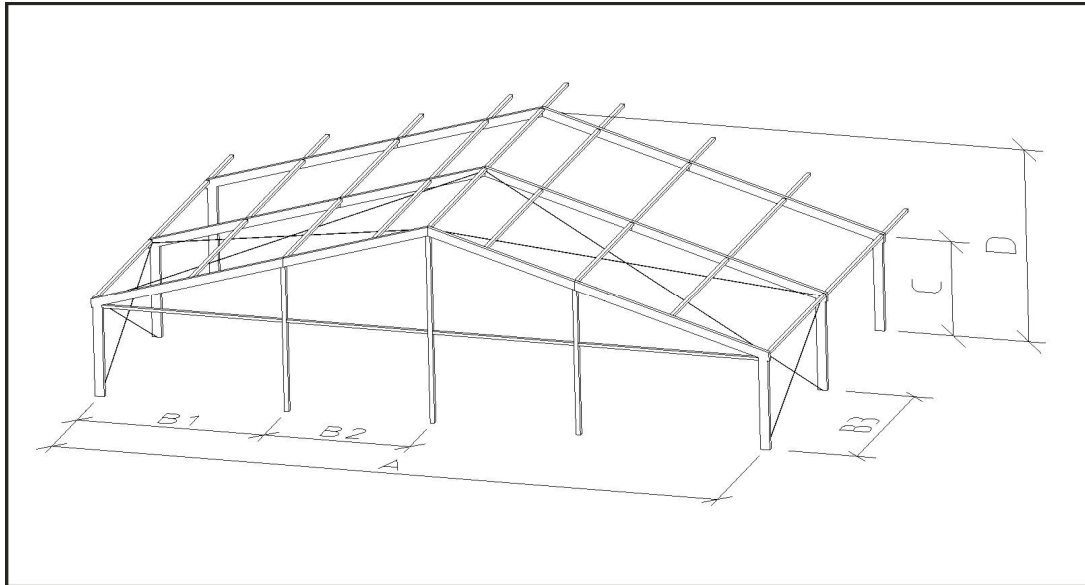

## System Measures

Width	(A)	18.03 m
Eave height	(C)	2.85 m
Ridge height	(D)	5.98 m
Gable truss	(B1)	5.01 m
Gable truss	(B2)	4.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		9.61 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data

Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance


Subject to technical modifications!



LOSBERGER DE BOER

# easyflex Party and Exhibition Hall

Type: 18.2/340 · Model: 588

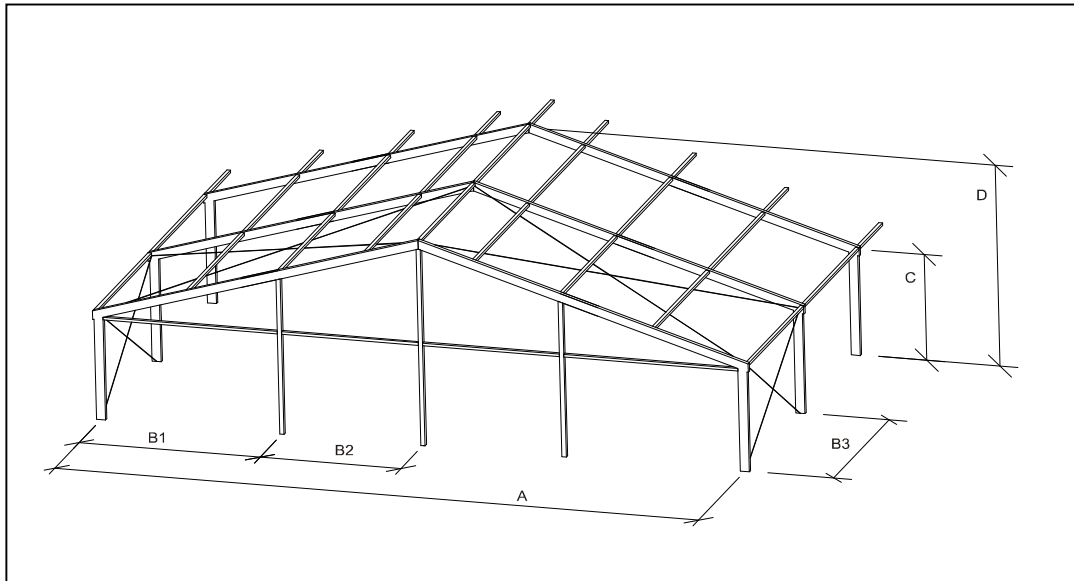

## System Measures

Width	(A)	18.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	5.98 m
Gable truss	(B1)	5.04 m
Gable truss	(B2)	4.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		9.61 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data

Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance


Subject to technical modifications!





# easyflex plus Arcum

Type: 10.2/340 · Model: XXX

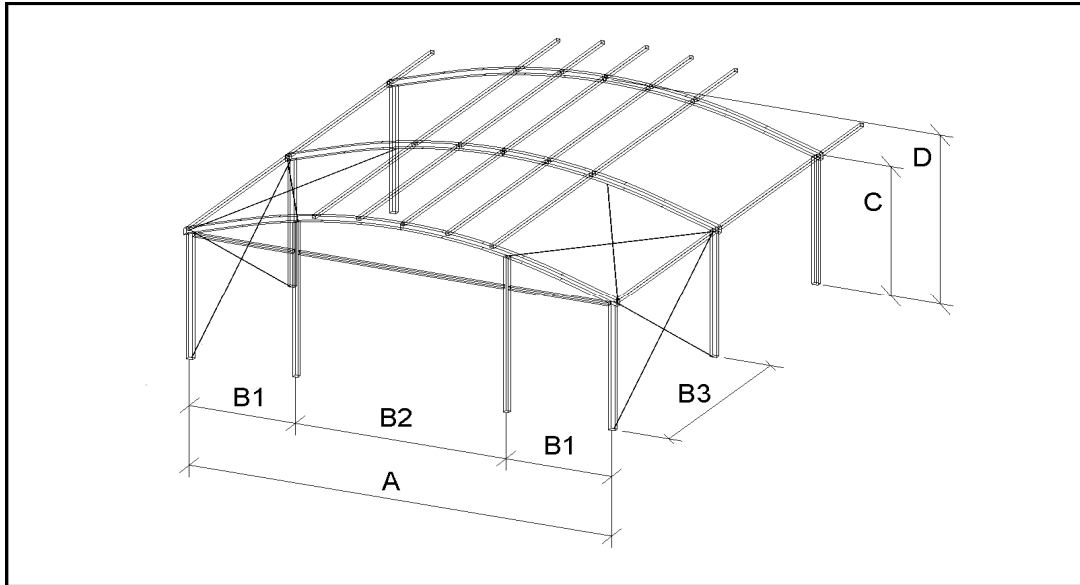

## System Measures

Width	(A)	10.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	4.25 m
Gable truss	(B1)	2.52 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		5.29 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data


Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance

Subject to technical modifications!



# easyflex plus Arcum

Type: 12.2/340 · Model: 785

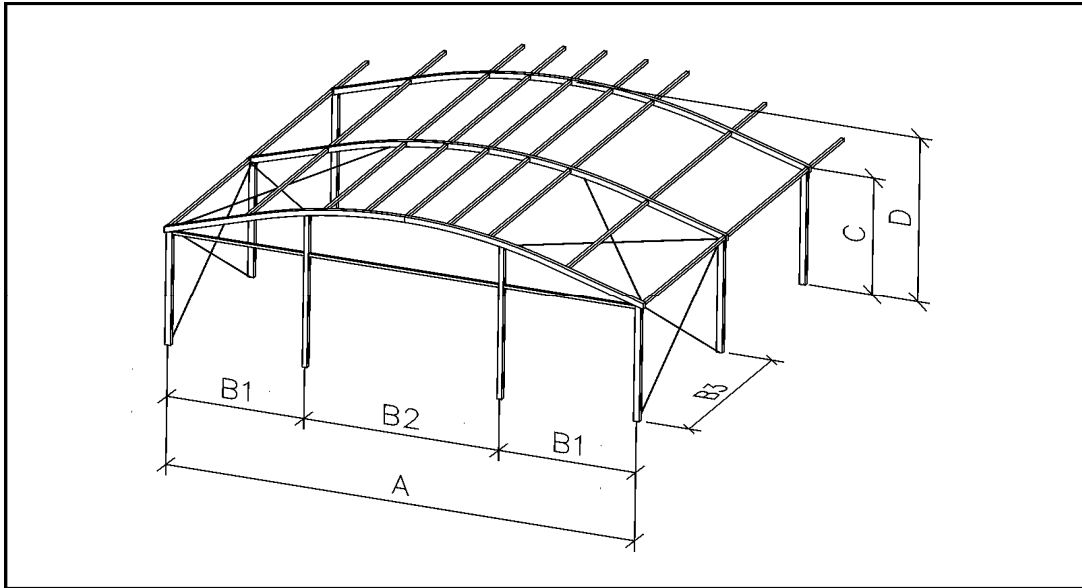

## System Measures

Width	(A)	12.03 m
Eave height	(C)	3.25 m
Ridge height	(D)	4.57 m
Gable truss	(B1)	3.52 m
Gable truss	(B2)	5.00 m
Truss-distance	(B3)	5.00 m
Roof slope		18.00 °
Longest component		6.34 m
Truss profile		150 x 120 mm

## Technical Description

### Aluminium Profiles

Solid, hard pressed  
4-groove aluminium hollow profile

### Steel Parts

hot-dip galvanized according to DIN EN ISO 1461

### Ground Anchoring

Ground stakes or weight anchoring upon request

## Load Requirements/Technical Data

Wind load acc. to DIN EN 13782  
Min. length 10.00 m  
Max. length unlimited in truss-distance

Subject to technical modifications!