





Premier

10 m

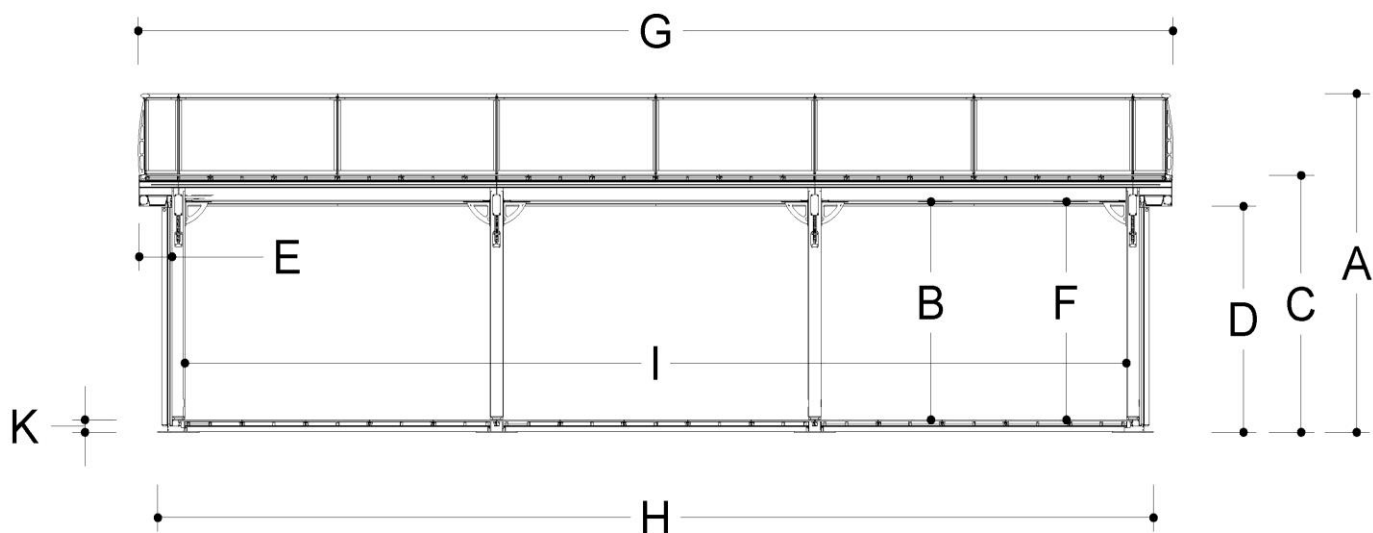

Technical data

	(mm)			
A	External ridge height	5017	Wind load	0,50 kN/m ²
B	Internal free ridge height	3265	Snow load	0 KN/m ²
B1	Internal free height ground floor	3265	Bearing capacity standard floor	500kg/m ²
C	External side height	3818	Column profile	200x200
D	External free height	3349	Mounting points in structure	Columns and rafters
E	Roof overhang	305	Roof incline	0°
F	Internal free side height	2566	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
G	External width of the roof	11257		
H	Maximum width ground level	10650		
I	Internal width between columns	9800		
J	Bay distance	5000		
K	Floorheight	183		

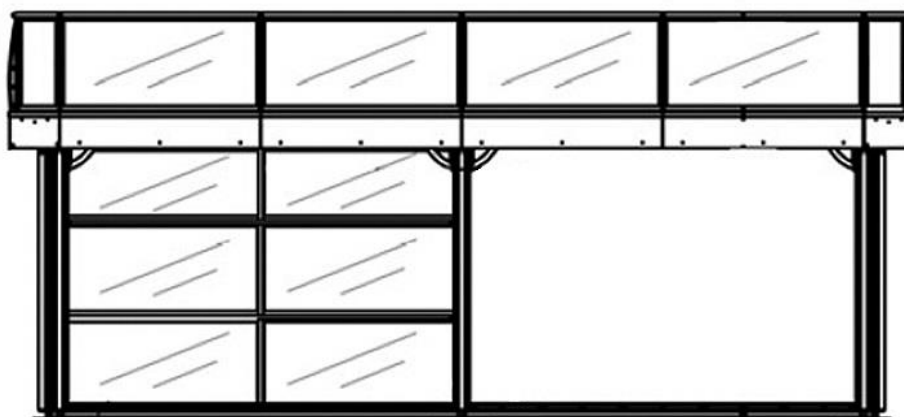


Options

Available roof covers	White opaque roof cover (bovenverdieping)	Available side curtains and side panels	Horizontal PVC side panels Horizontale glaspanelen
Available floors	Cassette floor Plate floor (begane grond) Antiskid cassette floor	Roof insulation	No
Available doors	Aluminium push bar door 2m (blind) Aluminium push bar door 2m (glass) Emergency door	Insulation side panels	Yes
		Connection to permanent buildings	Yes
		Connection to other Losberger De Boer structures	Yes




Premier

15 m

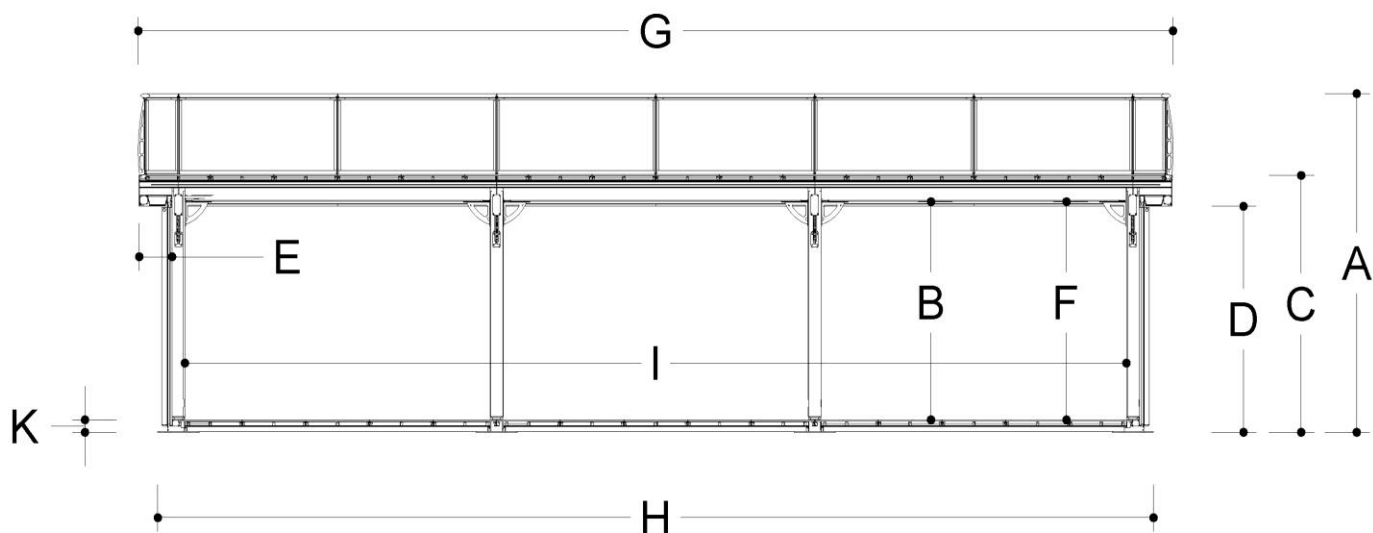


Technical data

		(mm)		
A	External ridge height	5017	Wind load	0,50 kN/m ²
B	Internal free ridge height	3265	Snow load	0 KN/m ²
B1	Internal free height ground floor	3265	Bearing capacity standard floor	500kg/m ²
C	External side height	3818	Column profile	200x200
D	External free height	3349	Mounting points in structure	Columns and rafters
E	Roof overhang	305	Roof incline	0°
F	Internal free side height	2566	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
G	External width of the roof	16257		
H	Maximum width ground level	15650		
I	Internal width between columns	14800		
J	Bay distance	5000		
K	Floorheight	183		

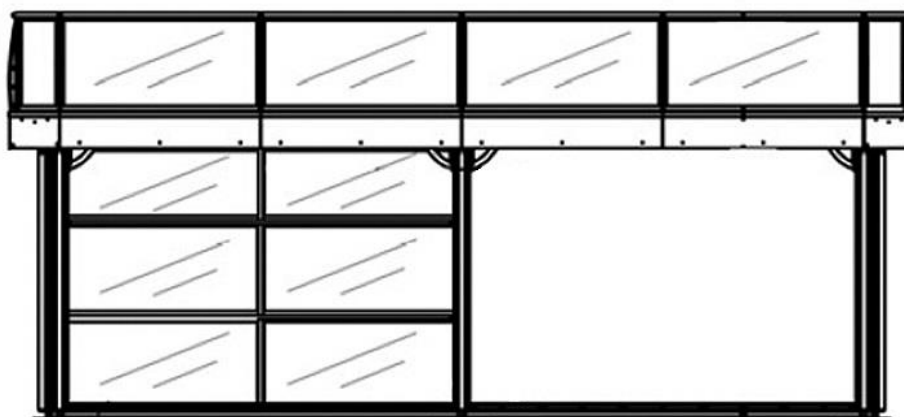


Options

Available roof covers	White opaque roof cover (bovenverdieping)	Available side curtains and side panels	Horizontal PVC side panels Horizontale glaspanelen
Available floors	Cassette floor Plate floor (begane grond) Antiskid cassette floor	Roof insulation	No
Available doors	Aluminium push bar door 2m (blind) Aluminium push bar door 2m (glass) Emergency door	Insulation side panels	Yes
		Connection to permanent buildings	Yes
		Connection to other Losberger De Boer structures	Yes

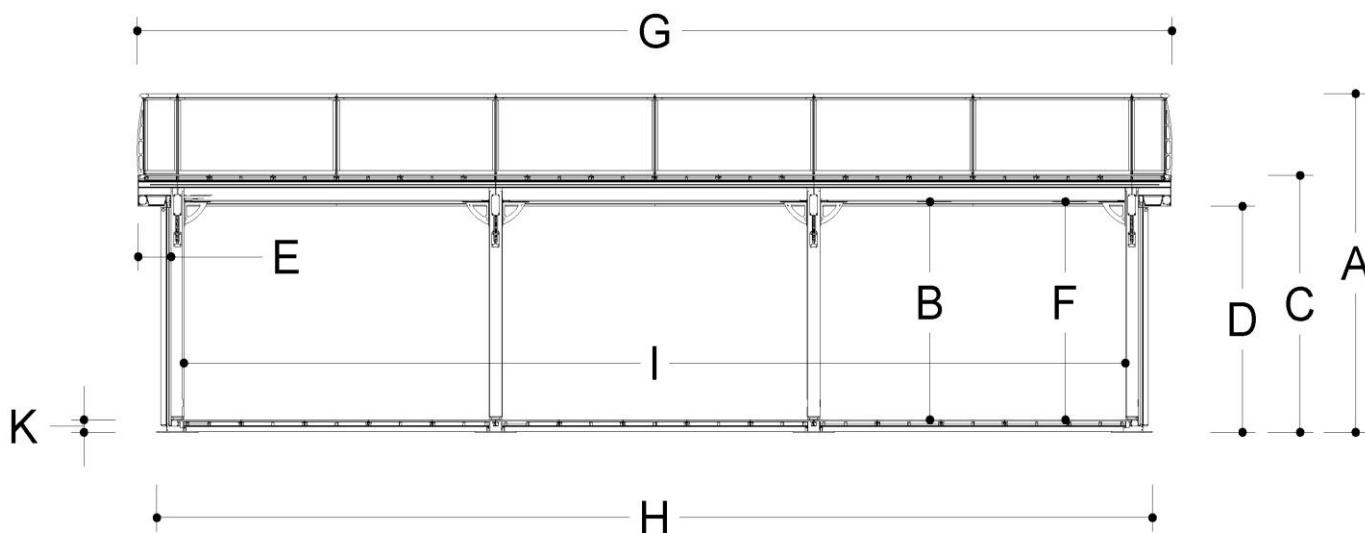

Technical data

	(mm)			
A	External ridge height	5017	Wind load	0,50 kN/m ²
B	Internal free ridge height	3265	Snow load	0 KN/m ²
B1	Internal free height ground floor	3265	Bearing capacity standard floor	500kg/m ²
C	External side height	3818	Column profile	200x200
D	External free height	3349	Mounting points in structure	Columns and rafters
E	Roof overhang	305	Roof incline	0°
F	Internal free side height	2566	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
G	External width of the roof	21257		
H	Maximum width ground level	20650		
I	Internal width between columns	19800		
J	Bay distance	5000		
K	Floorheight	183		

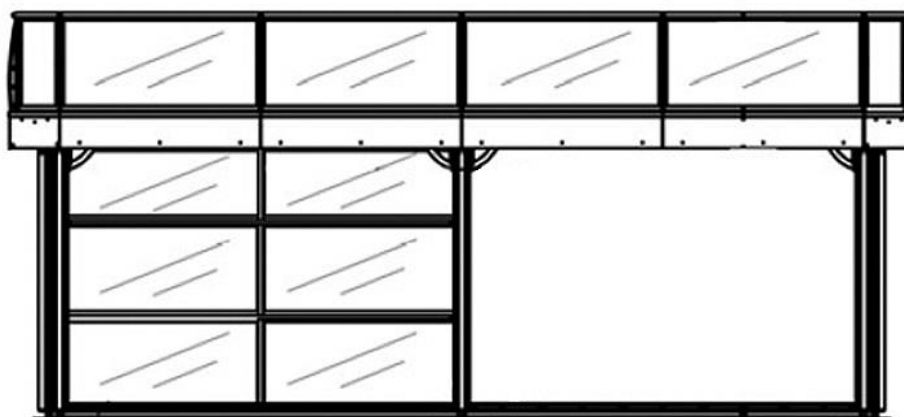

Options

Available roof covers	White opaque roof cover (bovenverdieping)	Available side curtains and side panels	Horizontal PVC side panels Horizontale glaspanelen
Available floors	Cassette floor Plate floor (begane grond) Antiskid cassette floor	Roof insulation	No
Available doors	Aluminium push bar door 2m (blind) Aluminium push bar door 2m (glass) Emergency door	Insulation side panels	Yes
		Connection to permanent buildings	Yes
		Connection to other Losberger De Boer structures	Yes